


Oscillator Specification: E4889LF

Issue A, 3rd October 2007


Outline: dimensions in mm

Pin	Function
1	Do not connect
7	Ground
8	Output
14	Supply Voltage, Vs

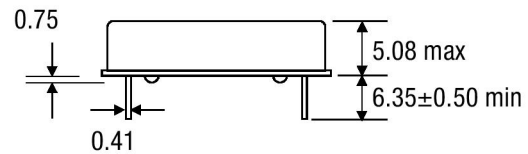

Marking: shall include as a minimum:

- 1) Manufacturer (RAKON)
- 2) Device number (E4889)
- 3) Frequency (10.0 MHz)
- 4) Date Code (YYWWL)
- 5) Antistatic symbol (Δ , denotes pin 1)

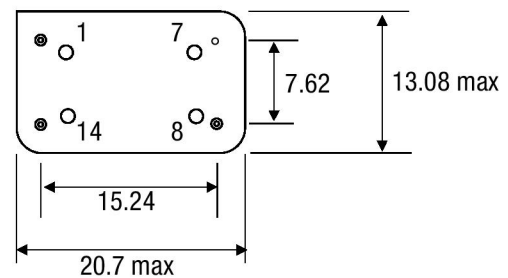

Electrical:

Frequency F0	10 MHz
Supply Voltage, Vs	3.3 V \pm 5%
Input Current	\leq 4 mA
Output	
Type	HCMOS
Load	15 pF
Vol	\leq 10% Vs
Voh	\geq 90% Vs
Rise time 10% to 90%	\leq 8 ns
Fall time 90% to 10%	\leq 8 ns
Duty Cycle, @ 50%	45% to 55%
Frequency Stability	
Calibration tolerance at 25°C	\leq \pm 1.0 ppm reference to F0
Temperature, 0 to 70°C	\leq \pm 0.28 ppm reference to $(F_{max}+F_{min})/2$
Supply Voltage, \pm 5%	\leq \pm 0.1 ppm reference to frequency at 3.3V
Load, \pm 5pF	\leq \pm 0.1 ppm reference to frequency at 15 pF
Ageing, 24 hours	\leq \pm 30 ppb (at constant Vs, Temp & Load)
Ageing, first year	\leq \pm 1.0 ppm
Ageing, 10 years incl. year 1	\leq \pm 3.0 ppm

Rakon Limited

T +64 9 573 5554, F +64 9 573 5559
 1 Pacific Rise, Mt Wellington, Auckland 1060, New Zealand
 Private Bag 99943, Newmarket, Auckland 1149, New Zealand

Oscillator Specification: E4889LF

Issue A, 3rd October 2007

Environmental:

Storage temperature range: -50 to 95°C

Vibration IEC 60068-2-6 Test Fc Procedure B4, 10 - 58 Hz 1.5mm displacement, 58 - 500 Hz at 100 ms⁻² (10_{gn}), 30 minutes in each of three mutually perpendicular planes at 1 octave per minute.

Shock IEC 60068-2-27 Test Ea, 1000ms⁻²(100_{gn}) acceleration for 6ms duration, half sine, shocks in each direction along 3 mutually perpendicular axes.

Sealing IEC 60068-2-17 Test Qk (Fine Leak), (MIL-STD-202 Method 112 Test condition C) and IEC 60068-2-17 Test Qc (Gross Leak),(MIL-STD-202 Method 112 Test condition D)

Solderability IEC 60068-2-20 Test Ta Method 1 (solder bath), (MIL-STD-202 Method 208), Temperature 235°C.

RoHS: Parts are fully compliant with the European Union directive 2002/95/EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment. Note: These RoHS compliant parts are suitable for assembly using both Lead-free solders and Tin/Lead solders.

Marking Indelibly marked, resistant to all common solvents.

"Samples supplied according to this specification are supplied from our development or pre-production programme and as such are not qualification approved products. No condition warranty or representation regarding quality, suitability, performance, life or continuation of supply is given or implied and Guarantee in clause 6a of our standard conditions is not applicable. The right is reserved to change the design or specification or cease supply without notice." RAKON UK LTD.

Rakon Limited

T +64 9 573 5554, F +64 9 573 5559
1 Pacific Rise, Mt Wellington, Auckland 1060, New Zealand
Private Bag 99943, Newmarket, Auckland 1149, New Zealand