

## ROM1490PS

The ROM1490PS uses Rakon's market-leading proprietary Mercury+™ technology, delivering the world's first ASIC-based and smallest OCXO in a hermetic package. This product family delivers  $\pm 10$  ppb frequency stability over  $-40$  to  $85^\circ\text{C}$  with short term ageing less than 1 ppb/day and frequency slope as low as  $0.1$  ppb/ $^\circ\text{C}$ . Using Rakon's innovative high-Q quartz crystals, ROM1490PS offers superior close-in phase noise performance, enabling Remote Radio Head PLLs to use a single reference clock to meet both network synchronisation requirements and air interface requirements.

Mercury+™ ASIC-OCXOs enable lower Total Cost of Ownership of customer equipment through improved reliability. With a small form factor and few discrete components, a ROM1490PS consumes only 0.4W at room temperature and has faster warm up times than traditional OCXOs.


### Features

- Superior close-in phase noise with high-Q SC-cut crystal
- $< 1\%$  VCO linearity
- Patented tilt compensation for lifetime performance
- Fast warm up time
- Ultra-reliable OTP memory programming
- Lower customer Total Cost of Ownership through VLSI ASIC-integration

### Applications

- Base Stations
- 5G RRH
- Small Cells
- Microwave transmission systems

14.2 x 9.2 x 6.5 mm




### Standard Specifications

Parameter	Min.	Typ.	Max.	Unit	Test Condition / Description
Nominal frequency		10 – 50		MHz	Standard frequencies: 10, 19.2, 20, 25, 30.72, 38.4, 50 MHz
Frequency calibration			$\pm 0.2$	ppm	Initial accuracy at $25^\circ\text{C} \pm 2^\circ\text{C}$
Reflow shift			$\pm 0.2$	ppm	Pre to post reflow $\Delta F$ (measured $\geq 60$ minutes after reflow)
Operating temperature range	-40		+85	$^\circ\text{C}$	
Frequency stability temperature			$\pm 10$ $\pm 5$	ppb	In still air. Reference to $(F_{\text{MAX}} + F_{\text{MIN}})/2$ $\pm 10$ ppb (Vc), $\pm 5$ ppb (Fixed frequency)
Frequency slope $\Delta F/\Delta T$ in still air		$\pm 0.1$	$\pm 0.5$	ppb/ $^\circ\text{C}$	Temperature ramp $\leq 1^\circ\text{C}/\text{minute}$
All causes stability			$\pm 4.6$	ppm	Including calibration, temperature, supply voltage & load changes and 20 years life, reference to Fn
Supply voltage stability		$\pm 5$		ppb	$\pm 2\%$ variation, reference to frequency at 3.3V
Load sensitivity		$\pm 5$		ppb	$\pm 10\%$ variation, reference to frequency at 15pF
Warm-up time		15	60	sec	Time needed for frequency to be within $\pm 20$ ppb reference to frequency after 1 hour, at $25^\circ\text{C}$ . Parameter is frequency, assembly and operating history dependent
Long term stability (Ageing)		1	0.3 1.5	ppb ppm	Per day, after 60 days of continuous operation First year 10 years
Supply voltage (Vcc)		2.7 – 5		V	$\pm 5\%$
Input power		1200 400	1500 440	mW	Warm up Steady state in still air at $25^\circ\text{C}$
Control voltage (Vc) <sup>1</sup>	0.25	1.25	2.25	V	
Frequency tuning	$\pm 1.9$		$\pm 3.3$	ppm	Reference to frequency at $V_c=1.25\text{V}$
Linearity			1	%	Deviation from straight line curve fit
Oscillator output	Regulated CMOS output (1.0, 1.8, 2.5V) or standard CMOS (options)				


<sup>1</sup> The GND of the control voltage (Vc) needs to be connected directly to pin 2 (GND) as ground lead impedance may cause performance degradation.

SSB Phase Noise (Typical value at 25°C)	Frequency	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	Unit
	19.2 MHz	-80	-110	-138	-154	-159	-160	-161	dBc/Hz
	30.72 MHz	-73	-105	-133	-153	-158	-160	-161	
	38.4 MHz	-70	-102	-132	-150	-155	-157	-159	

## Frequency Stability over Temperature @ 19.2 MHz

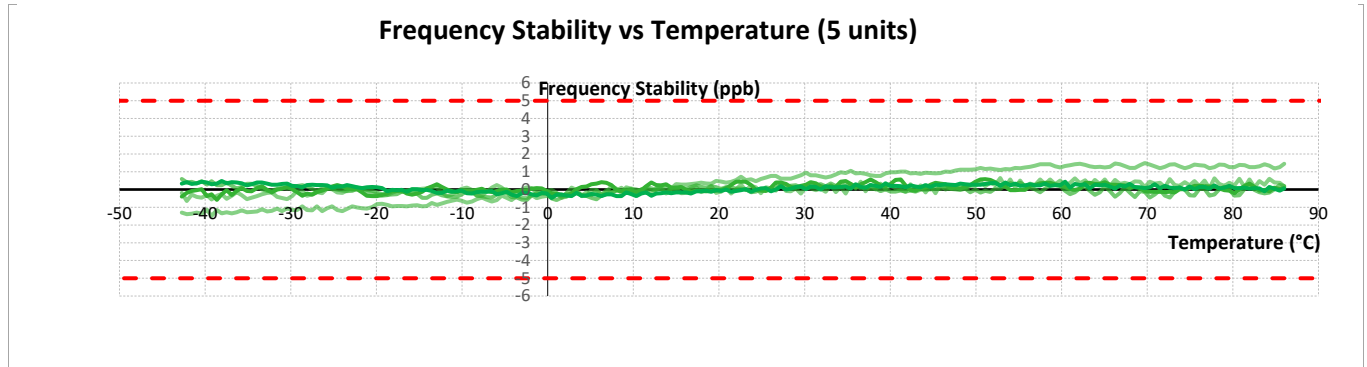

## Warm-up Time @ 19.2 MHz

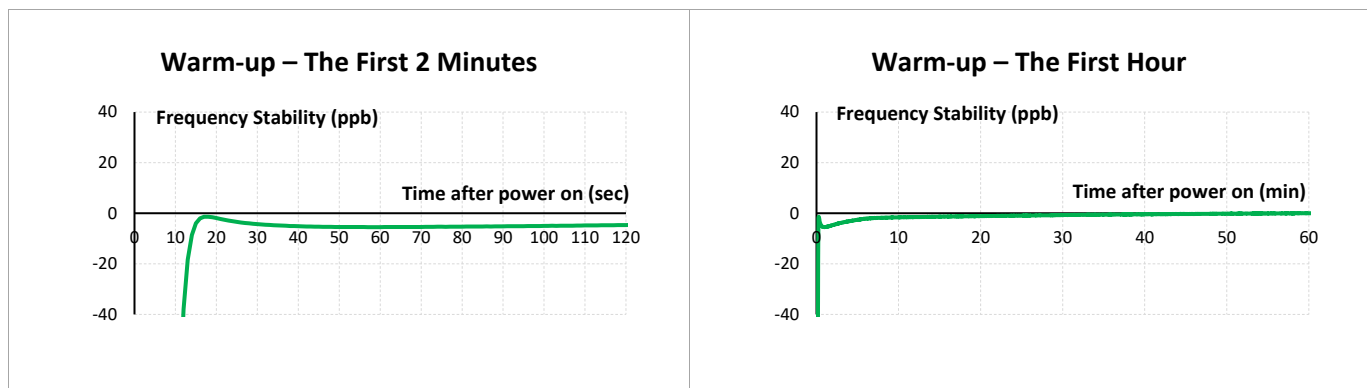

## Model Outline and Recommended Pad Layout

**RECOMMENDED PAD LAYOUT**  
- TOP VIEW

Pin	Connections
1	Control Voltage (Vc) / Do not connect (GND optional)*
2	Vc_GND / Do not connect (GND optional)*
3	GND
4	Output
5	NC
6	Supply Voltage (Vcc) <i>for correct operation decouple the supply voltage with a 10 µF capacitor close to the oscillator</i>

**NOTE**

- Unit: mm
- Base: FR4
- Finish: 0.05 ~ 0.13 µm Gold over 3 ~ 6 µm Nickel

\* Depending on detail specification