

## RFPO65

The RFPO65 is from the world’s first ASIC-based OCXO product family and utilizes Rakon’s patented Mercury™ ASIC technology. This Stratum 3 compliant oscillator delivers temperature stability as low as ±10ppb (over -20 to 70°C) and is capable of short term aging of typically less than ±2ppb per day.

With a highly integrated oven included, the RFPO65 ensures short warm-up times and consumes very low power – only 350mW at room temperature. The ASIC architecture delivers a 1000x reliability improvement when compared to traditional discrete OCXOs. The RFPO65 is available in an industry standard, Dual-In-Line (DIL) package.

### Features

- Frequency stability over temperature as low as ±10ppb over -20 to 70°C
- Low power consumption
- High reliability

### Applications

- Stratum 3
- Small Cells
- Switches and Routers
- Time & Frequency References
- SyncE and IEEE 1588


21.7 x 13.08 x 8.65 mm




### Standard Specifications

Parameter	Min.	Typ.	Max.	Unit	Test Condition / Description
Nominal frequency		10 – 26		MHz	Standard frequencies: 10, 12.8, 19.2, 19.44, 20, 24.576, 25 and 26MHz
Frequency calibration			±0.5	ppm	Initial accuracy at 25°C ±2°C
Reflow shift			±1	ppm	Pre to post reflow ΔF (measured ≥ 60 minutes after reflow)
Frequency stability over temperature in still air			±10 – ±100	ppb	Reference to (FMAX + FMIN)/2
Frequency slope ΔF/ΔT in still air			±0.5 – ±2	ppb/°C	Temperature ramp ≤ 1°C/minute
Operating temperature range	-40		85	°C	
Supply voltage stability		±10		ppb	±5% variation, frequency ≤ 26MHz
Load sensitivity		±10		ppb	±5pF / ±10% variation, frequency ≤ 26MHz
Warm-up time		<3		minutes	The time needed for the frequency to be within ±20ppb of the frequency after 1 hour, at 25°C. This parameter is frequency, assembly and operating history dependent
Acceleration sensitivity		<2		ppb/g	Gamma vector of all 3 axes, 30 to 1500Hz
Holdover drift		< ±2.5 – ±4		ppb	24 hours, temperature variation ≤ ±1°C. After 30 days of continuous operation
Free-run accuracy		±4.6		ppm	All causes, 20 years life, reference to nominal fr
Loop bandwidth for wander generation compliance	3			mHz	MTIE compliant with GR-1244 Fig 5-5 & G.812 Type III Fig1 (≤100 ns), TDEV compliant with GR-1244 Fig 5-4 & G.812 Type III Fig2 (≤10 ns), oscillator stabilised 24 hours at Constant temperature (±1°C, still air), data collected over 100,000 seconds at 1 second intervals (-3dB cut-off, 2nd order high pass loop filter)
Long term stability (ageing)		<±2	±1 ±3	ppb ppm ppm	Per day (after 30 days of continuous operation) First year 10 years
Root Allan Variance (20 MHz)		7.10 <sup>-11</sup>			tau = 1.0s
Supply voltage (Vcc)		2.7 – 5.5		V	±5%
Input power (warm up)		1000		mW	-40 to 85°C devices
Input power (steady state in still air, 25°C)			400	mW	-40 to 85°C devices
Oscillator output – C/Sinewave	0.8	1.1		Vpk-pk	At minimum supply voltage, 10kΩ//10pF load
Oscillator output – HCMOS					
Output voltage level high (VOH)			10% Vcc	V	
Output voltage level high (VOL)	90% Vcc			V	
Duty cycle	45		55	%	At 50% level
Rise and fall times			4	ns	10 to 90%
Load	0	15	30	pF	

### SSB Phase Noise (Typical Value at 25°C) and MTIE

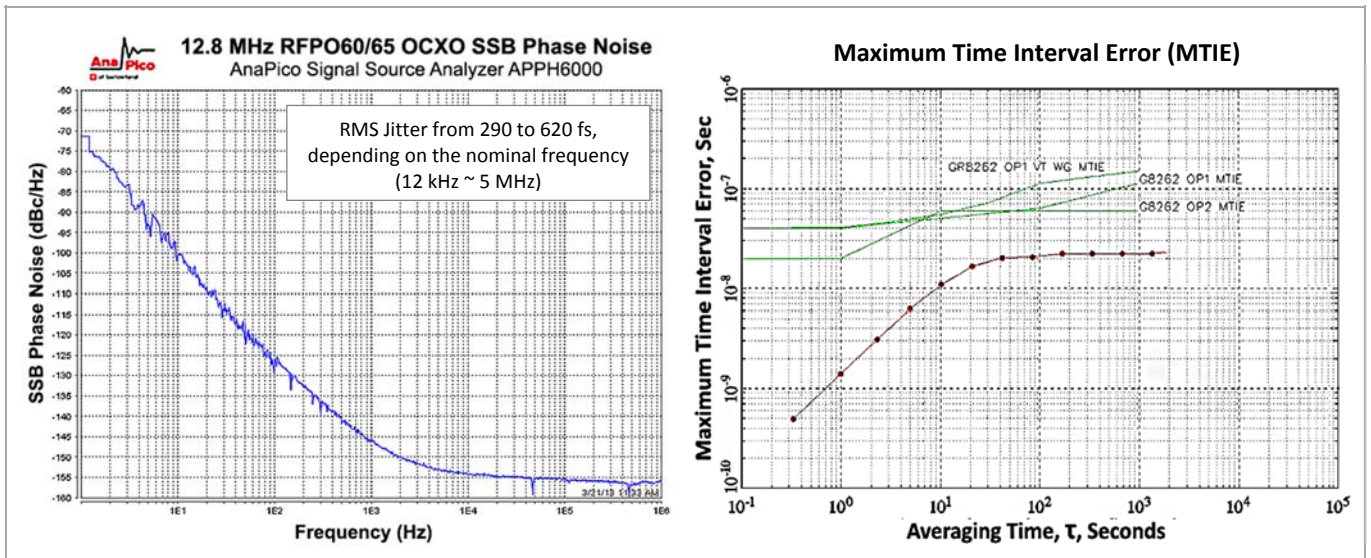

### Model Outline

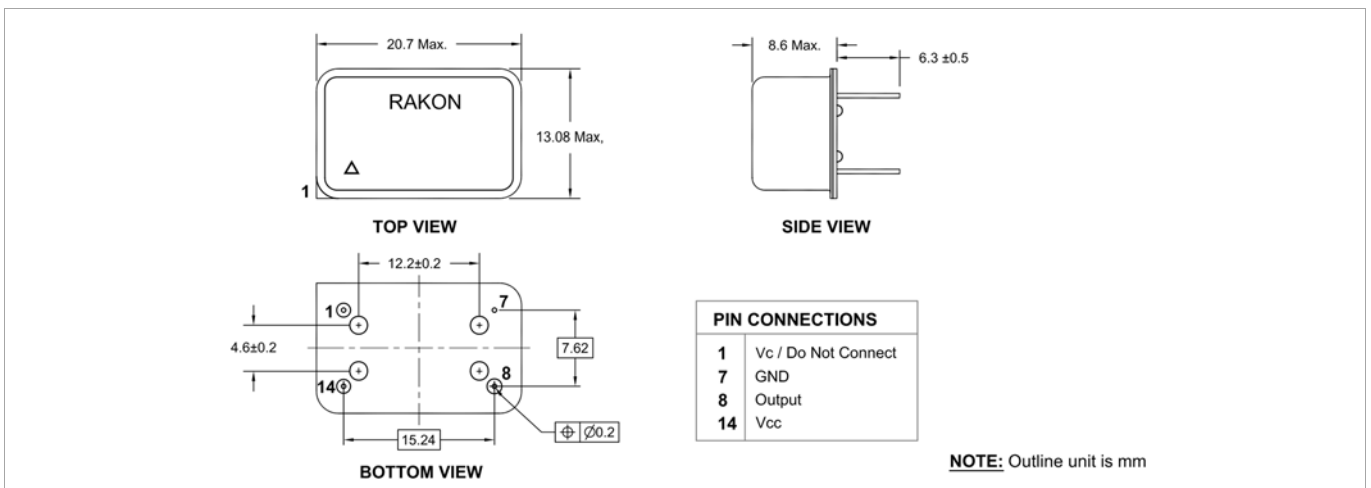

### Model Code Builder

