

RST2520A

The RST2520A employs an analogue ASIC for the oscillator and a high-order temperature compensation circuit in a small form factor 2.5 x 2.0 x 0.8 mm package. This low-power SMD Temperature Compensated Crystal Oscillator (TCXO) provides a voltage control option (VCTCXO) with a wide frequency range available from 13 to 52 MHz. Supply voltage options are 1.8 to 3.3 V.

The high stability RST2520S is designed for high-performance GNSS and communication applications where the required frequency stability ± 0.5 ppm over operating temperature ranges from -40 to 85°C.


Features

- Frequency slope and perturbation specifications can be customised to the application's requirement
- Excellent phase noise performance
- Frequency stability ± 0.5 ppm over operating temperatures from -40 to 85°C

Applications

- GNSS
- Smartphone
- Consumer devices
- Communications
- Wi-Fi

2.5 x 2.0 x 0.8 mm

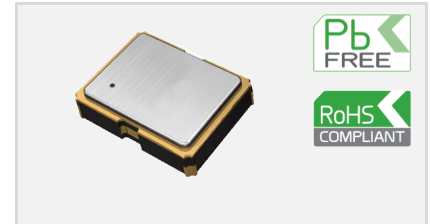

Standard Specifications


Parameter	Min.	Typ.	Max.	Unit	Test Condition / Description
Nominal frequency (Fn)		13 – 52		MHz	
Frequency calibration			± 1	ppm	Offset from nominal frequency measured at 25°C $\pm 2^\circ\text{C}$
Reflow shift			± 1	ppm	Two consecutive reflows
Operating temperature range	-40		85	°C	The operating temperature range over which the frequency stability is measured
Frequency stability over temperature			± 0.5	ppm	Referenced to the midpoint between minimum and maximum frequency value over the specified temperature range ¹ . Control voltage set to the midpoint of Vc. RIT2520A available for 100 screen test
Frequency slope			± 0.1	ppm/°C	Minimum of one frequency reading every 2°C over the operating temperature range ²
Static temperature hysteresis			0.6	ppm	Frequency change after reciprocal temperature ramped over the operating range. Frequency measured before and after at 25°C
Sensitivity to supply voltage variations			± 0.1	ppm	V _{DD} varied $\pm 5\%$ at 25°C
Sensitivity to load variations			± 0.2	ppm	$\pm 10\%$ load change at 25°C ²
Long term stability			± 1	ppm	Frequency drift over 1 year at 25°C
Acceleration sensitivity			2	ppb/g	Gamma vector of all three axes from 30 to 1500Hz
Supply voltage (V _{DD})		1.8 – 3.3		V	With a tolerance of $\pm 5\%$
Control voltage (Vc) range	0.3 0.4	0.9 1.4	1.5 2.4	V	V _{DD} \leq 2.3V V _{DD} > 2.3V
Supply current			2	mA	At maximum V _{DD} ²
Output voltage level	0.8			V _{pk-pk}	At minimum V _{DD} , specified for load stated in oscillator output section at 25°C ²
Output waveform					DC coupled clipped sinewave ³

¹ Parts should be shielded from drafts causing unexpected thermal gradients. Temperature changes due to ambient air currents on the oscillator can lead to short term frequency drift.

² Specified for load stated in oscillator output section at 25°C.

³ External AC-Coupling capacitor required. 1 nF or greater recommended.

Model Outline and Recommended Pad Layout

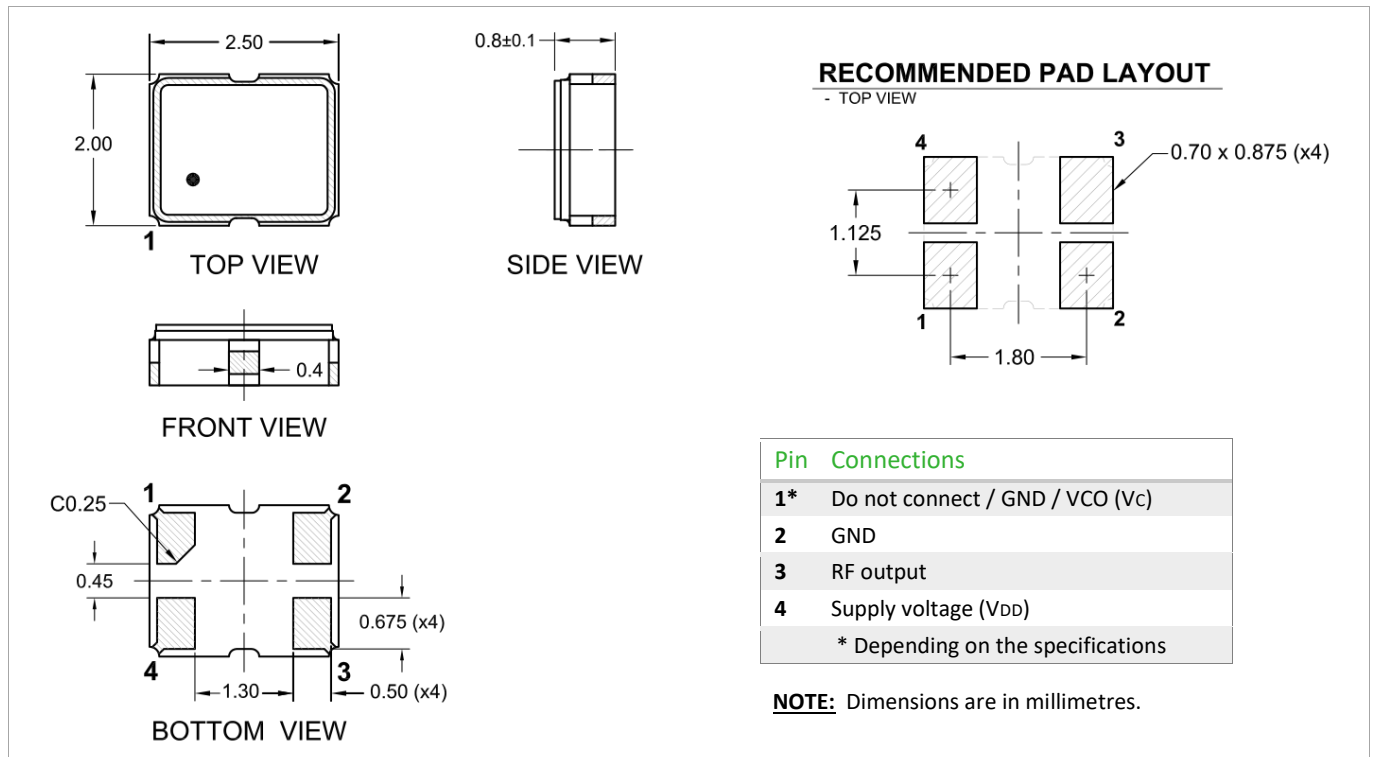

Test Circuit

