

RVX5032M

The RVX5032M is a high-frequency and low phase noise performance VCXO. With an impressively low RMS phase jitter 0.1 ps typ. (12 kHz to 20 MHz offset). It maintains remarkable performance even in a high-temperature operating range of up to 105°C.

This compact SMD (Surface Mount Device) has a 5.0 x 3.2 mm footprint, offering precise frequency stability. It caters to a wide spectrum of applications with a broad selection of industry-standard frequencies, ranging from 60 to 230 MHz. The RVX5032M boasts a short lead time, ensuring swift availability for your projects.

Features

- Fast sample turnaround
- LVC MOS, LVPECL, or LVDS output options
- 0.1 ps typ. RMS phase jitter (12 kHz to 20 MHz)
- Wide frequency range

Applications

- Base stations
- Ethernet
- DSL/ADSL
- WiMAX/W-LAN
- Wi-Fi


5.0 x 3.2 x 1.2 mm



Standard Specifications

Parameter	Min.	Typ.	Max.	Unit	Test Condition / Description
Nominal frequency	60 60		180 250	MHz MHz	LVC MOS LVPECL or LVDS
Temperature range	-40		105	°C	
Temperature stability			±25 ±30	ppm	Temperature range: -40 to 85°C Temperature range: -40 to 105°C
Frequency stability			±50	ppm	Including frequency calibration, operating temperature range, supply and load variations, and 1 year ageing at 25°C. 10 years ageing available on request
Absolute pull range (APR)	±50			ppm	Referenced at V _c = 1.65V
Supply voltage (V _{DD})		3.3		V	With a tolerance of ±5%
Supply current			30 50 70	mA mA mA	For LVC MOS For LVDS For LVPECL
RMS phase jitter (@122.88 MHz) ¹		0.1	0.15	ps	Integrated from 12kHz to 20MHz

Model Outline and Recommended Pad Layout

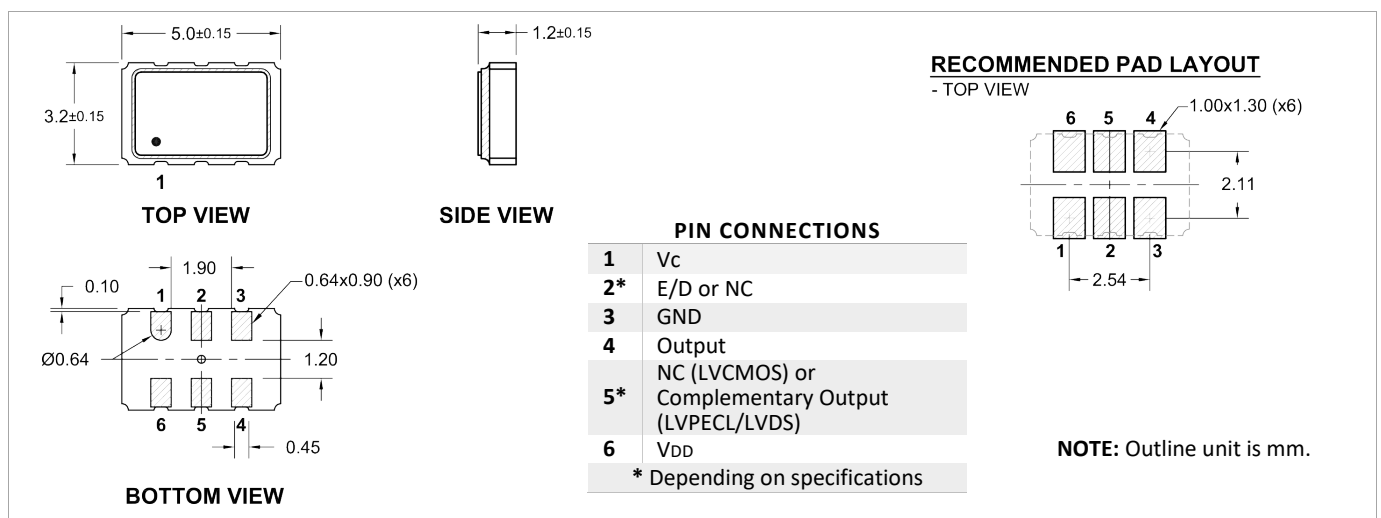

¹ RMS phase jitter value varies depending on the output type and frequency.