


QEN08

2.5 x 2.0 mm, SMD

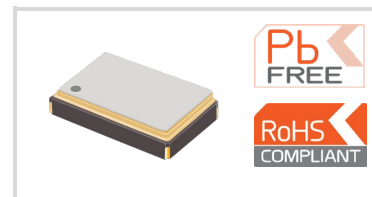

Frequency and Electrical Characteristics

Parameter	Min.	Typ.	Max.	Unit	Test condition / Description		
Nominal frequency ¹ (Fn)	1		125	MHz			
Operating temperature range		-10 to +70	-40 to +85	°C	See ‘Order Part Example’		
Frequency stability over temperature ²			±25 to ±100	ppm	Referenced to frequency reading at 25°C and the specified load capacitance		
Storage temperature range	-55		+125	°C			
Long-term stability (Ageing)			±2	ppm	Frequency drift over 1 year at 25°C		
Power supply voltage(V _{CC})							
1.5V (P option)	1.425	1.5	1.575	V _{DC}	See ‘Order Part Example’		
1.8V (N option)	1.710	1.8	1.890				
2.8V (M option)	2.66	2.8	2.94				
3.3V (D option)	3.135	3.3	3.465				
HCMOS output load			15	pF			
Output logic levels							
Output logic high (V _{OH})	90%V _{CC}			V _{DC}	With 15pF HCMOS load		
Output logic low (V _{OL})			10%V _{CC}				
Duty cycle ³	40	50	60	%	See ‘Order Part Example’		
Rise & fall time			7	ns	10% V _{CC} ~ 90% V _{CC}		
Start-up time			10	ms			
Input current							
	Load capacitance	Frequency		V _{CC} = 3.3V	V _{CC} = 2.8V	V _{CC} = 1.8V	V _{CC} = 1.5V
	C _L = 15 pF	1.000 to 24.999MHz		15 mA	10 mA	6 mA	4 mA
		25.00 to 39.999MHz		20 mA	15 mA	8 mA	6 mA
		40.00 to 59.999MHz		30 mA	20 mA	12 mA	10 mA
		60.00 to 125.00MHz		50 mA	40 mA	30 mA	25 mA

Order Part Example – QEN08BDA / 50.000MHZ




Parameter	Product family and package	Frequency stability (FvT)	Supply Voltage (V _{CC})	Output	Output Symmetry	Nominal Frequency (Fn. MHz)
Code	QEN08	B	D	A	R	50.000MHZ
Decode	QEN = XO 08 = SMD, 2.5x2.0 mm	A = ±100ppm vs -10 to +70°C B = ±50ppm vs -10 to +70°C C = ±25ppm vs -10 to +70°C D = ±100ppm vs -40 to +85°C F = ±50ppm vs -40 to +85°C G = ±25ppm vs -40 to +85°C	A = 5.0V D = 3.3V M = 2.5V N = 1.8V	A = HCMOS, 15pF	Blank = 40/60% R = 45/55%	Please enter Fn

¹ For 5V version, maximum frequency is 54MHz only.

² Include 25°C tolerance, operating temperature range, input voltage change (V_{CC} ±5%), load change (15pF ±10%), first year ageing, shock and vibration.


³ Duty cycle 45/55% is available on option

Model Outline, Recommended Pad Layout and Marking

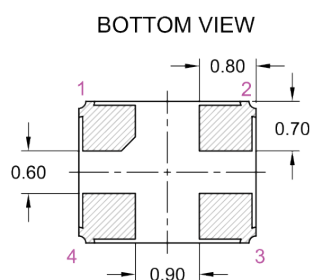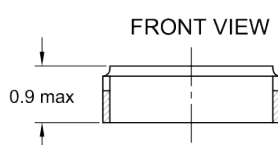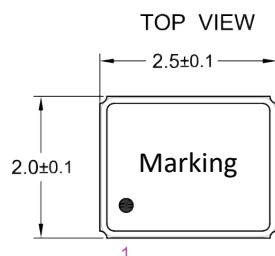

Marking		Example for QEN08FDAR / 25.000 MHz
Line 1	1xxxxx	Product code: 104154
Line 2	YYWW-M	Date and Manufacturing code: 1346-G Year code (YY): 13 = 2013, Week code (WW): 46 = Week 46 of the year, G = Manufacturing code

RECOMMENDED PAD LAYOUT
(TOP VIEW)

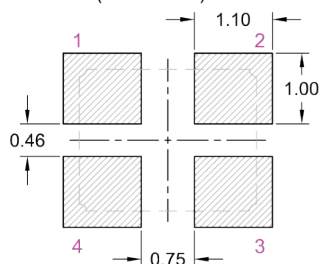


Pin	Connections
1	Tri-state (Open = Active, 1 = Active, 0 = High)
2	GND
3	Output
4	Vcc

NOTE:

Dimension unit is in millimetre.


Packaging

TAPRE DETAILS:

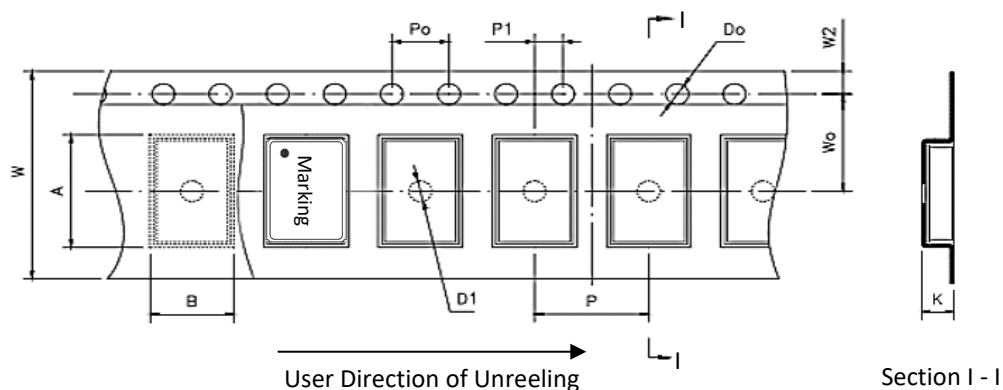

Parameter	Code	Dimension	Tolerance
Pitch of components	P	4.0	± 0.1
Pitch of sprocket hole	P_0	4.0	± 0.1
Length from hole center to component center	P_1	2.0	± 0.1
Width of carrier tape	W	8.0	± 0.3
Width of adhesive tape	W_0	1.75	± 0.1
Height of component pocket	A	2.75	± 0.1
Width of component pocket	B	2.25	± 0.1
Gap of hold down tape and carrier tape	W_2	0.5	± 0.1
Diameter of sprocket hole	D_0	$\Phi 1.5$	± 0.05
Diameter of feed hole	D_1	$\Phi 1.5$	± 0.25
Total of tape thickness	K	1.0	± 0.1

REEL DETAILS

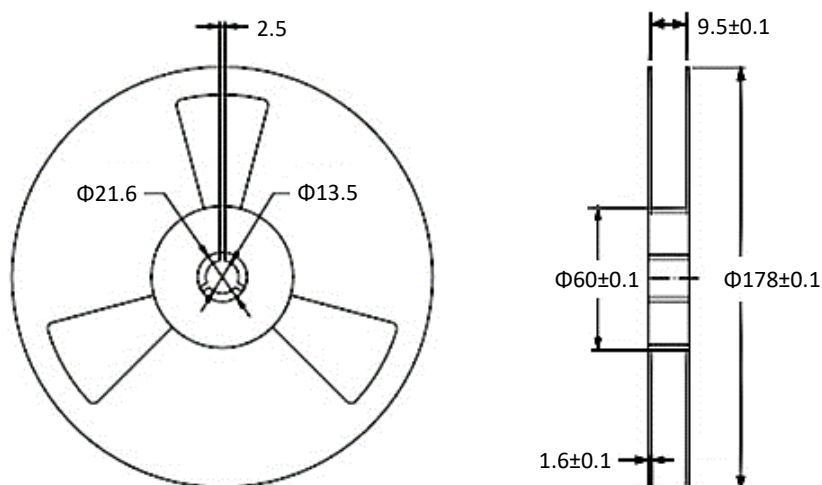

NOTE:

- Standard Packing Quantity (SPQ): 3000 pcs/reel
- Unit: mm

Reflow soldering Profile

