

QESM01

7.0 x 5.0 mm, SMD



Frequency and Electrical Characteristics

Parameter	Min.	Typ.	Max.	Unit	Test condition / Description
Nominal frequency (Fn)	6		100	MHz	
Calibration tolerance			±10 to ±50	ppm	Frequency at 25°C ± 2°C and specified load capacitance
Reflow shift			±1	ppm	Frequency shift after reflow with 4 hours settling at 25°C
Operating temperature range		-20 to 70	-40 to 85	°C	Refer to ordering information
Storage temperature range	-40		+85	°C	
Frequency stability over temperature			±10 to ±50	ppm	Referenced to frequency reading at 25°C and the specified load capacitance
Long-term stability (Ageing)			±2	ppm	Frequency drift over 1 year at 25°C
Shunt capacitance (CO)			7.0	pF	
Load capacitance (CL)	10		32	pF	Refer to ordering information
Drive level	10	100	500	µW	
Equivalent series resistance (ESR)					Mode of vibration: Fundamental (AT-cut) Fundamental (AT-cut) Fundamental (AT-cut) 3 rd Overtone (AT-cut) 3 rd Overtone (AT-cut)
6.000 to 7.999MHz			100		
8.000 to 15.999MHz			60		
16.000 to 39.999MHz			40	Ω	
40.000 to 83.999MHz			70		
84.000 to 100.000MHz			60		
Insulation resistance (IR)	500			MΩ	100 V ±15 V at 25°C

Environmental Specifications

Parameter	Test condition / Description
Mechanical vibration	10g, Frequency: 10Hz ~ 2KHz according to standard CEI 68-2-63
Shock	100g, 6ms according to standard CEI 68-2-27

Order Part Example – QESM01.1.30.HQ.30.20 / 6.000MHz

Parameter	Package type	Vibration mode	Frequency tolerance	Operating temperature range	Frequency stability	Load capacitance	Nominal Frequency (MHz)
Code	QESM01	1	10	HQ	30	20	6.000MHz
Decode	QESM = SMD Crystal 01 = 7.0 x 5.0 mm	1 = Fundamental 3 = 3 rd overtone	10 = ±10ppm 20 = ±20ppm 30 = ±30ppm 50 = ±50ppm	D = -40°C F = -30°C H = -20°C Q = +70°C T = +85°C	10 = ±10ppm 20 = ±20ppm 30 = ±30ppm 50 = ±50ppm	10 = 10pF 20 = 20pF 30 = 30pF	Please enter the nominal frequency


Model Outline, Recommended Pad Layout and Marking

Marking		Example: QESM01.1.30.HQ.30.20 / 6MHz
Line 1	Manuf code + Rakon code (6 digits)	N-106216
Line 2	Frequency in MHz (6digits)	6.000

Pin	Connections
1	Crystal
2	GND
3	Crystal
4	GND/NC


NOTE:
Dimensions are in millimetre.

Reflow Soldering Profile

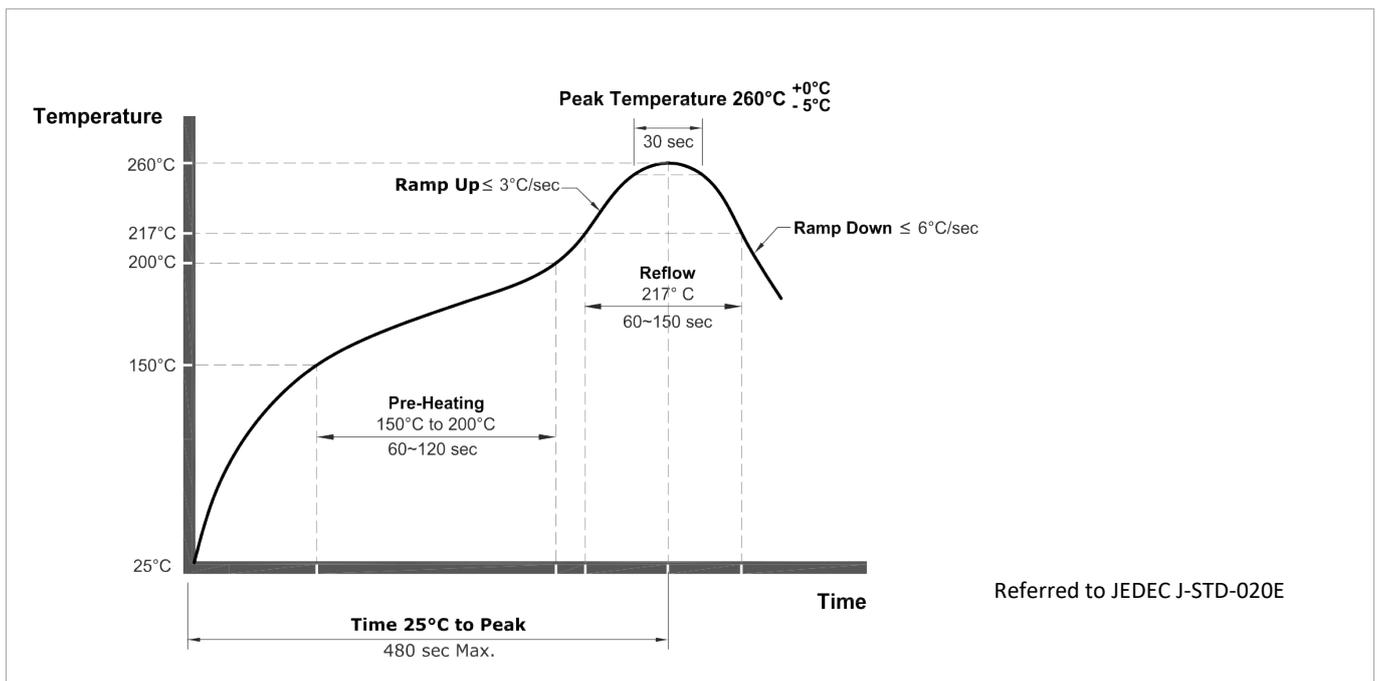


Packaging

TAPE DETAILS:

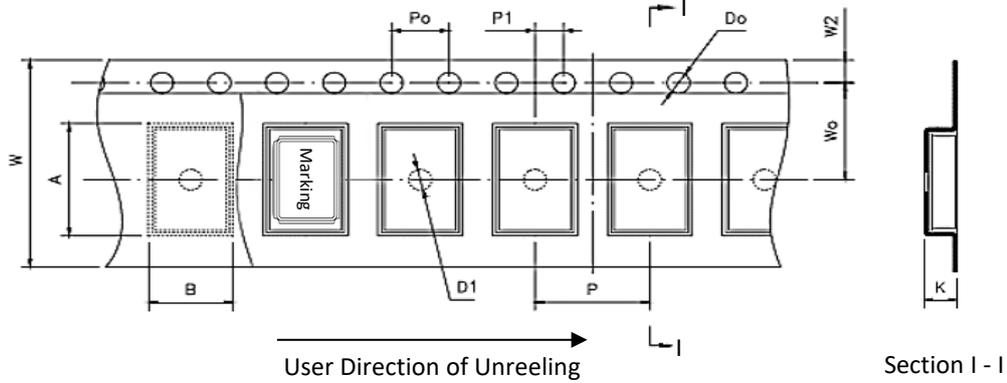

Parameter	Code	Dimension	Tolerance
Pitch of components	P	8.0	± 0.1
Pitch of sprocket hole	P ₀	4.0	± 0.1
Length from hole center to component center	P ₁	2.0	± 0.1
Width of carrier tape	W	16.0	+0.3/-0.1
Width of adhesive tape	W ₀	7.5	± 0.1
Height of component hole	A	7.4	± 0.1
Width of component hole	B	5.4	± 0.1
Gap of hold down tape and carrier tape	W ₂	1.75	± 0.1
Diameter of sprocket hole	D ₀	Φ 1.5	± 0.05
Diameter of feed hole	D ₁	Φ 1.5	± 0.25
Total of tape thickness	K	1.8	± 0.1

REEL DETAILS:

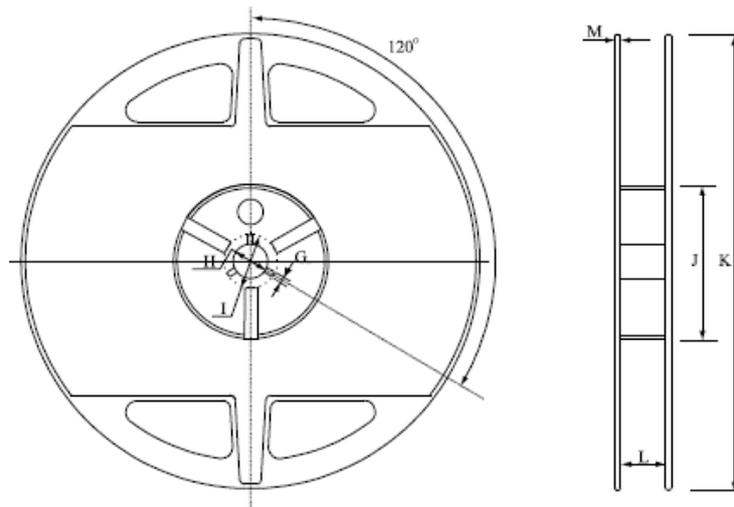

G	H	I	J	K	L	M
2.5 ± 0.5	13.5 ± 0.5	21.6 ± 0.5	60.0 ± 1.0	178.0 ± 1.0	17.5 ± 1.0	1.6 ± 0.2

NOTE:

- Standard Packing Quantity (SPQ): 1000 pcs/reel
- Unit: mm